

# M ALPAIR 6

# Installation Guide




## Round

Classic smooth response small driver with full frequency range delivery.

## Specifications

IMP-NOMINAL	4.00OHM
REVC	3.60OHM
FO	74.HZ
SD	3.8KMM <sup>2</sup>
VAS	3.3LTR
CMS	1.6M M/N
MMD	2.8G
MMS	2.93G
BL	2.87TM
QMS	2.5
QES	0.6
QTS	0.48
LEVC	62.55UH
NO	0.21%
SPLO	86.0 DB
XMAX (1 WAY)	5.0MM
POWER	15WATTS CONT. 30WATTS MAX

— Frequency Response  
— Impedance  
- - - 30 Degree Off Axis Response

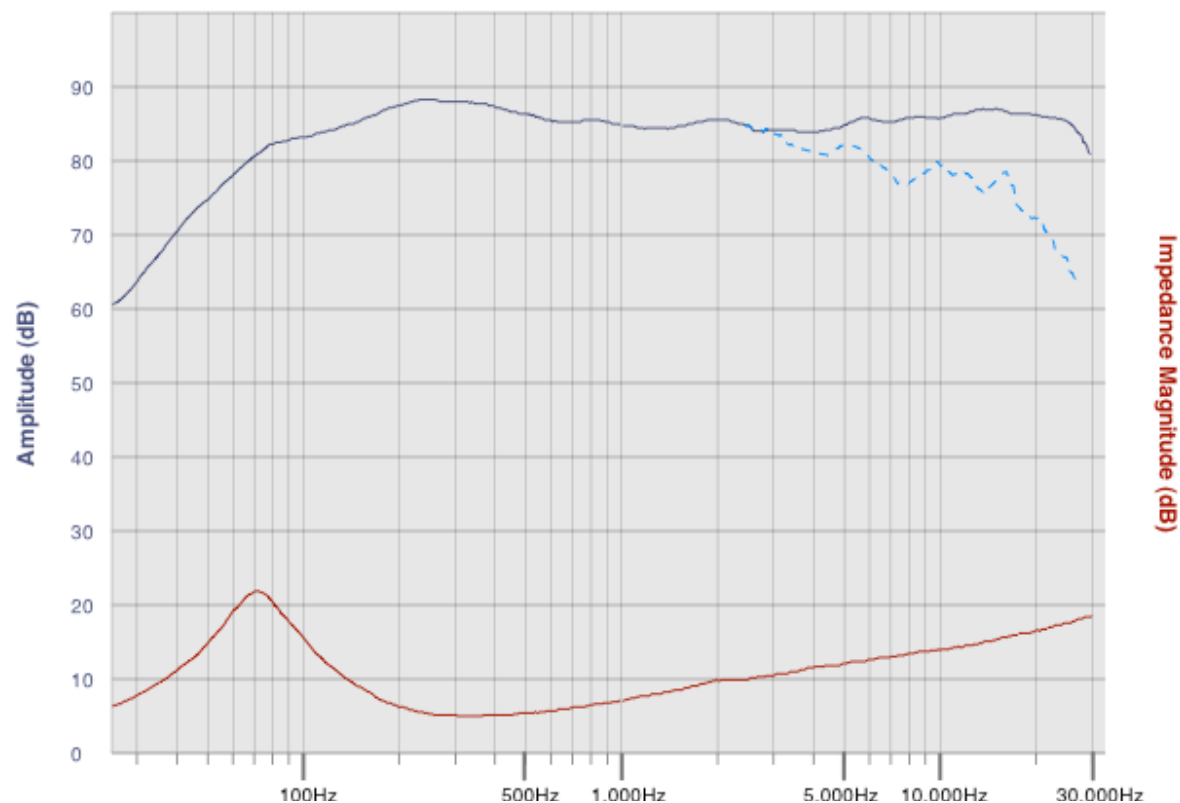

# ALPAIR 6

# Installation Guide



## Round

Classic smooth response small driver with full frequency range delivery.

